




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B26B 21/18, 21/54	A1	(11) International Publication Number: WO 91/01204 (43) International Publication Date: 7 February 1991 (07.02.91)
<p>(21) International Application Number: PCT/US90/03863</p> <p>(22) International Filing Date: 10 July 1990 (10.07.90)</p> <p>(30) Priority data: 8916885.0 24 July 1989 (24.07.89) GB</p> <p>(71) Applicant (for all designated States except US): THE GILLETTE COMPANY [US/US]; Prudential Tower Building, Boston, MA 02199 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only) : BROWN, Frank, Edward [GB/GB]; 1 Timbers Walk, Maidenhead, Berkshire (GB). TAYLOR, John [GB/GB]; 8 Raggleswood Close, Early, Reading (GB). WILKES, David, John [GB/GB]; 4 Mendip Close, Langley, Slough (GB).</p>		<p>(74) Agents: HANDELMAN, Joseph, H. et al.; Ladas & Parry, 26 West 61 Street, New York, NY 10023 (US).</p> <p>(81) Designated States: AT (European patent), BE (European patent), BR, CA, CH (European patent), DE (European patent)*, DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>

(54) Title: SAFETY RAZORS

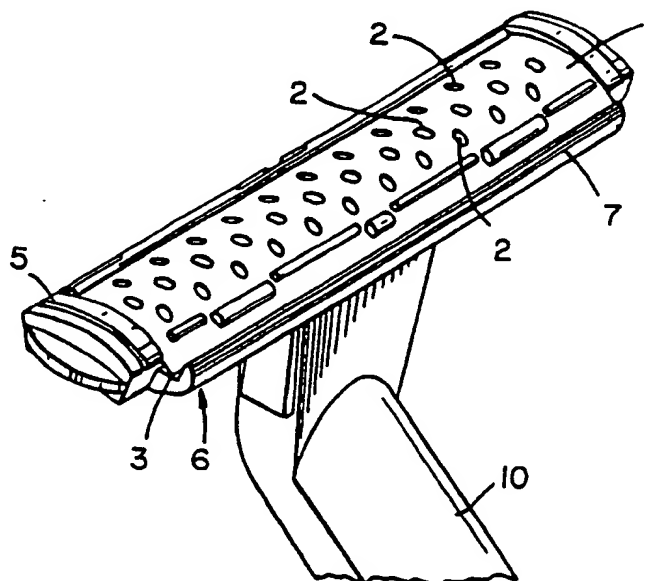

(57) Abstract

A safety razor in which the blade (1) has a plurality of sharp-edge apertures (2) for shaving and also a sharpened rectilinear edge (3) for trimming. Provision is made for effecting displacement of the blade relative to the razor handle (10) so that the trimming edge which is normally in an inoperative position can be moved into an operative position. The blade is held in an arched position so that the aforesaid movement is of a rocking nature.

BEST AVAILABLE COPY

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MC	Monaco
AU	Australia	FI	Finland	MG	Madagascar
BB	Barbados	FR	France	ML	Mali
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GR	Greece	NL	Netherlands
BJ	Benin	HU	Hungary	NO	Norway
BR	Brazil	IT	Italy	PL	Poland
CA	Canada	JP	Japan	RO	Romania
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
DE	Germany	LU	Luxembourg	TD	Chad
DK	Denmark			TC	Togo
				US	United States of America

- 1 -

Safety Razors

This invention relates to safety razors, more particularly in which a blade member is in the form of a foil having a plurality of sharp edged apertures distributed over its surface to constitute a plurality of
5 discrete cutting edges. Such blade members are referred to in the following description as "perforated blades".

In accordance with the invention, there is provided a safety razor comprising a perforated blade mounted in a foil holder and having a sharpened,
10 rectilinear trimming edge means.

Preferably, the said edge means is normally inaccessible for use but can be brought into operation by effecting displacement of at least a part of the foil holder relative to the razor handle.

15 The razor can accordingly operate normally as a perforated blade razor, typically being employed with a reciprocating, "scrubbing" action, but the sharpened edge means can be brought into use as required for trimming operations, such as the trimming of sideburns or
20 moustaches.

Some forms of razor in accordance with the invention are described in detail below, by way of example, with reference to the accompanying drawings, in which:-

25 Figs. 1 and 2 are perspective views of a razor with its parts adjusted into a shaving mode and a trimming

mode, respectively;

Figs. 3, 4 and 5 are sectional views showing the razor parts in a normal shaving mode, a fixed position and the trimming mode, respectively;

5 Fig. 4A is a scrap detail view taken in the direction of arrow 'A' in Fig. 4;

Fig. 6 is a perspective view of the head of a second form of razor;

10 Figs. 7 and 8 are sectional views showing parts of the second razor in its normal and trimming positions, respectively;

Figs. 9 and 11 show a third form of a razor in its different operative positions; and

15 Figs. 10 and 12 are scrap views illustrating details of the razor of Figs. 9 and 11.

The razor shown in the drawings comprises a perforated blade 1 in the form of a foil having sharp-edged apertures 2 distributed over its surface and having one longitudinal edge sharpened to form a trimming edge 3.

20 The blade is attached to a foil carrier 5 mounted in turn on a support 6 including a guard member 7 and depending lugs 8 by which the support 6 is mounted on cams 9 fast with the razor handle 10.

25 The support 6 is mounted on the handle in a manner which permits free, rocking movement of the support, relative to the handle, about an axis parallel with the trimming edge 3. This is conveniently provided by means of a pair of stationary, arcuate cams 9 fast with the handle, which engage in arcuate grooves in the lugs 8 of
30 the support. The centre of curvature of the cams and grooves is disposed close to the surface of the foil, for example at the axis 'C' indicated in the drawings.

35 The carrier has a range of free, rocking movement during normal shaving to permit additional conformance of the foil to the skin contours. However, to expose the

trimmer edge, the support must first be latched into its fixed position, shown in Fig. 4, at one end of its range of rocking movement. For this purpose, a latch projection 14 is formed on one or both lugs 8 for co-operation with an adjacent portion on the cam 9. As best seen in Fig. 4A, the latch projection 14 takes the form of a triangular fillet which presents a stop to free rocking movement of the support in normal use of the razor. However, the user can apply some manual effort to force the cam to spring past the projection 14 into the position shown in Fig. 4.

The support 6 includes a platform section 11 fast with the remainder of the support and onto which the foil carrier is clipped in a bi-stable manner. In the "normal" and "fixed" positions shown in Figs. 3 and 4, the platform 11 is fully engaged in a channel formed in the underside of the foil carrier. However, due to the resilience of the parts, the carrier can be displaced angularly relative to the support, to the position shown in Fig. 5, in which the forward (left-hand) edge of platform section 11 has snapped past a detent projection 13 formed on the foil carrier. This exposes the sharpened edge for trimming, with the foil carrier and support in fixed position.

To summarise: the razor is normally in the condition illustrated in Figs. 1 and 3, in which the edge 3 is safely obscured and the support 6 and foil carrier 5 can rock as one about the axis C relative to the handle;

by deliberate manual displacement applied through the carrier 5, the carrier and support can be moved into the position shown in Fig. 4, in which the edge 3 is still concealed but the support is held stationary on the handle;

further manual effort applied in the same direction causes the carrier 5 to spring into the position illustrated in Figs. 2 and 5, exposing the edge 3 for use;

reversal of the above procedure will first restore the carrier 5 to its normal position relative to the support and guard, and then release the support for rocking movement about the axis C.

5 It will be noted that the latch projection 14 is asymmetrical in its form so as to present less resistance to movement of the support into the extreme position of Fig. 4 than in the reverse direction. Also, it is
10 designed to present less resistance to relative motion than the catch projection 13 in one direction than in the other, so that a smaller effort is required to return the carrier to its normal position than to return the support to its normal position.

Although movement of the parts into the position
15 shown in Fig. 4 is primarily intended as a prelude to exposing the trimming edge, the razor is perfectly operable as a "fixed head" razor in that condition.

The above described razor may be designed as a disposable razor, in which case the support 6 is
20 permanently associated with the handle. Alternatively, the support may be releasably mounted on the handle cams, or the foil carrier (and foil) may be releasably mounted on the support so that the foil and foil carrier, with or without the support, can form exchangeable blade
25 cartridges.

In the embodiment illustrated in Figures 6, 7 and 8, the perforated blade 1 has, in addition to the apertures 2 provided for normal shaving, a row of elongated apertures 31 positioned adjacent one edge of the
30 foil. The inner edges of these apertures are sharpened to form a series of aligned, rectilinear trimming edges 31A.

In this razor, there is no movable guard to conceal the trimming edges in normal use of the razor. Instead, they are simply positioned so as to be held clear
35 of the skin in the normal range of attitudes of the blade

relative to the handle.

The foil holder 5 is again supported on the cam 9 so as to have a range of rocking movement in normal use of the razor, to either side of the medial position shown in Fig. 7. When it is desired to bring the trimming edges
5 into play, the foil holder is rocked in a clockwise sense, as viewed in Fig. 7, to force the cam to spring past the latch projection 14, to lock the foil holder 5 in the position shown in Fig. 8, in which the trimming edges 31A
10 are positioned "high up" at the leading side of the blade foil.

The razor shown in Figs. 9 and 10 is generally similar to that of Figs. 6 to 8 except for the means of latching the foil holder in the trimming position. In
15 this embodiment, the handle is fitted with a manually actuated sliding latch comprising rod 20 slidably mounted in a slot 21 in the handle and an external operating button 22. The rod has a pair of rounded ribs 23 at its lower end and the sides of the slots are formed with upper
20 and lower pairs of recesses 24, 26 for co-operation with the ribs.

The latch is shown in Fig. 9 in its lower, retracted position, where it is held by engagement of the ribs 23 in the lower pair of recesses 24, and in which the
25 foil holder 5 is free to rock for normal shaving. For trimming operation, the latch is pushed to its upper, extended position. The upper end of the rod engages the underside of the foil holder 5 and rocks the holder clockwise to its extreme position, as shown in Fig. 11. The parts are all held in this position by engagement of
30 the ribs 23 in the upper pair of recesses 26, as shown in Fig. 12.

Upon manual return of the latch to its lower position, the foil holder is again free to rock.

CLAIMS:

1. A safety razor comprising a perforated blade (1) having a plurality of sharp edged apertures (2) distributed over its surface, the said blade (1) being mounted in a foil carrier (5), characterized in that the razor
5 further comprises sharpened, rectilinear trimming edge means (3, 31A).
2. A safety razor according to claim 1, characterized in that the said edge means is formed on the said blade
10 (1).
3. A safety razor according to claim 1 or 2, characterized in that the said edge means (3, 31A) is normally inaccessible for use and is selectively brought into
15 operation by displacement of the foil carrier (5) relative to the razor handle (10).
4. A safety razor according to claim 3, characterized in that the foil carrier (5) is mounted on a support (6)
20 in turn mounted on the razor handle (10) the said support including a guard member (7) which normally obscures the edge means (3), and that the carrier (5) is displaceable, relative to the support (6) to expose the edge means (3).
- 25 5. A safety razor according to claim 4, characterized in that the carrier (5) is connected to the support (6) in a bi-stable manner to occupy either of two operative positions, means being provided for resiliently detaining the carrier (5) in each position relative to the support
30 (6).
6. A safety razor according to claim 4 or 5, characterized in that the blade (1) is held in an arched condition in the carrier (5) and that the support (6) is
35 mounted on the handle (7) for rocking movement about a

horizontal axis (C) parallel with the axis of curvature of the blade (1) and that indexing means (14) are provided for selectively retaining the support (6) at an extreme position in its range of rocking movement.

5

7. A safety razor according to claim 3, characterized in that the said foil carrier (5) is mounted on the handle for movement between a position of normal use in which the edge means is substantially inaccessible for use, and an
10 extreme position in which the edge means is presented in a position of use.

8. A safety razor according to claim 7, characterized in that the foil carrier (5) supports the blade member (1)
15 in an arched condition and is mounted on the handle for rocking movement about an axis parallel with the axis of curvature of the blade (1), the carrier being displaceable into an extreme position in which it is held against rocking movement and in which the edge means (31A) is
20 presented for use.

FIG. 1


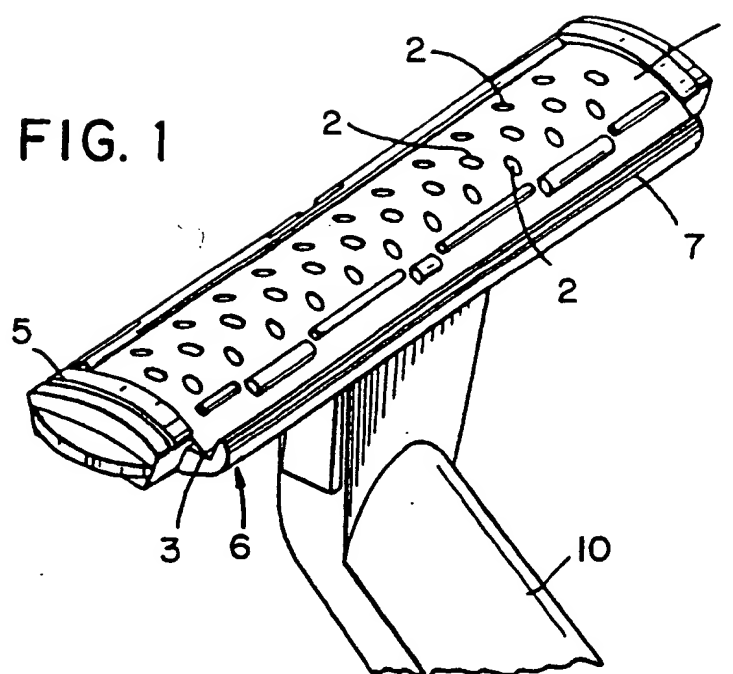


FIG. 2

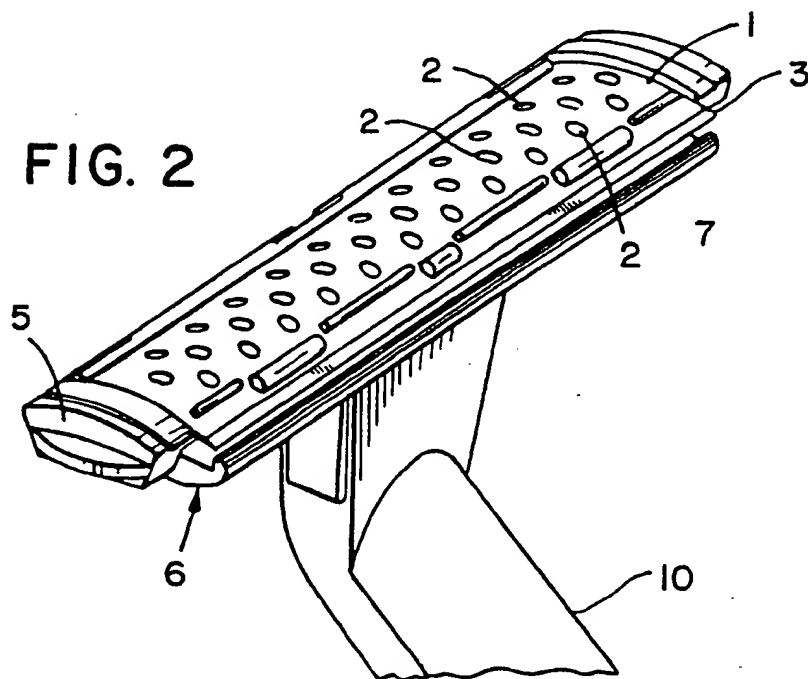

SUBSTITUTE SHEET

2 / 7

FIG. 3

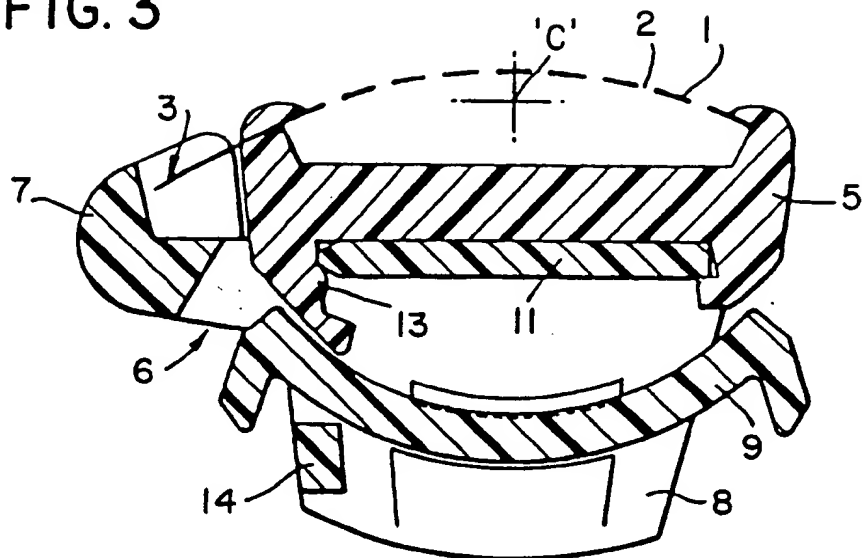


FIG. 4



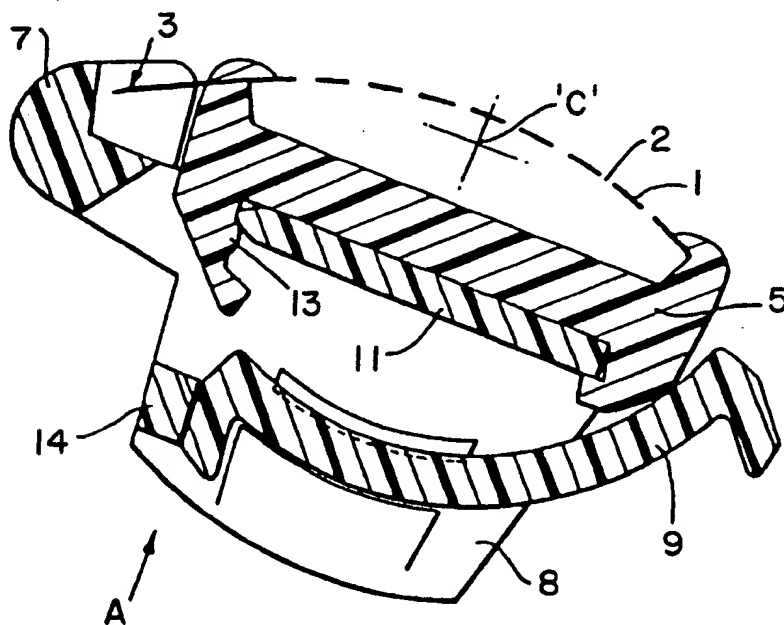


FIG. 4A



SUBSTITUTE SHEET

FIG. 5

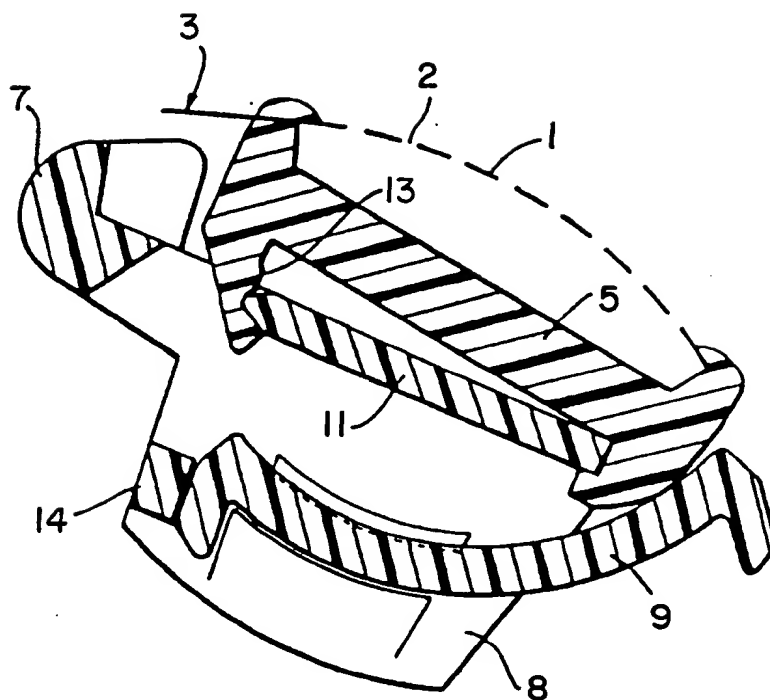

SUBSTITUTE SHEET

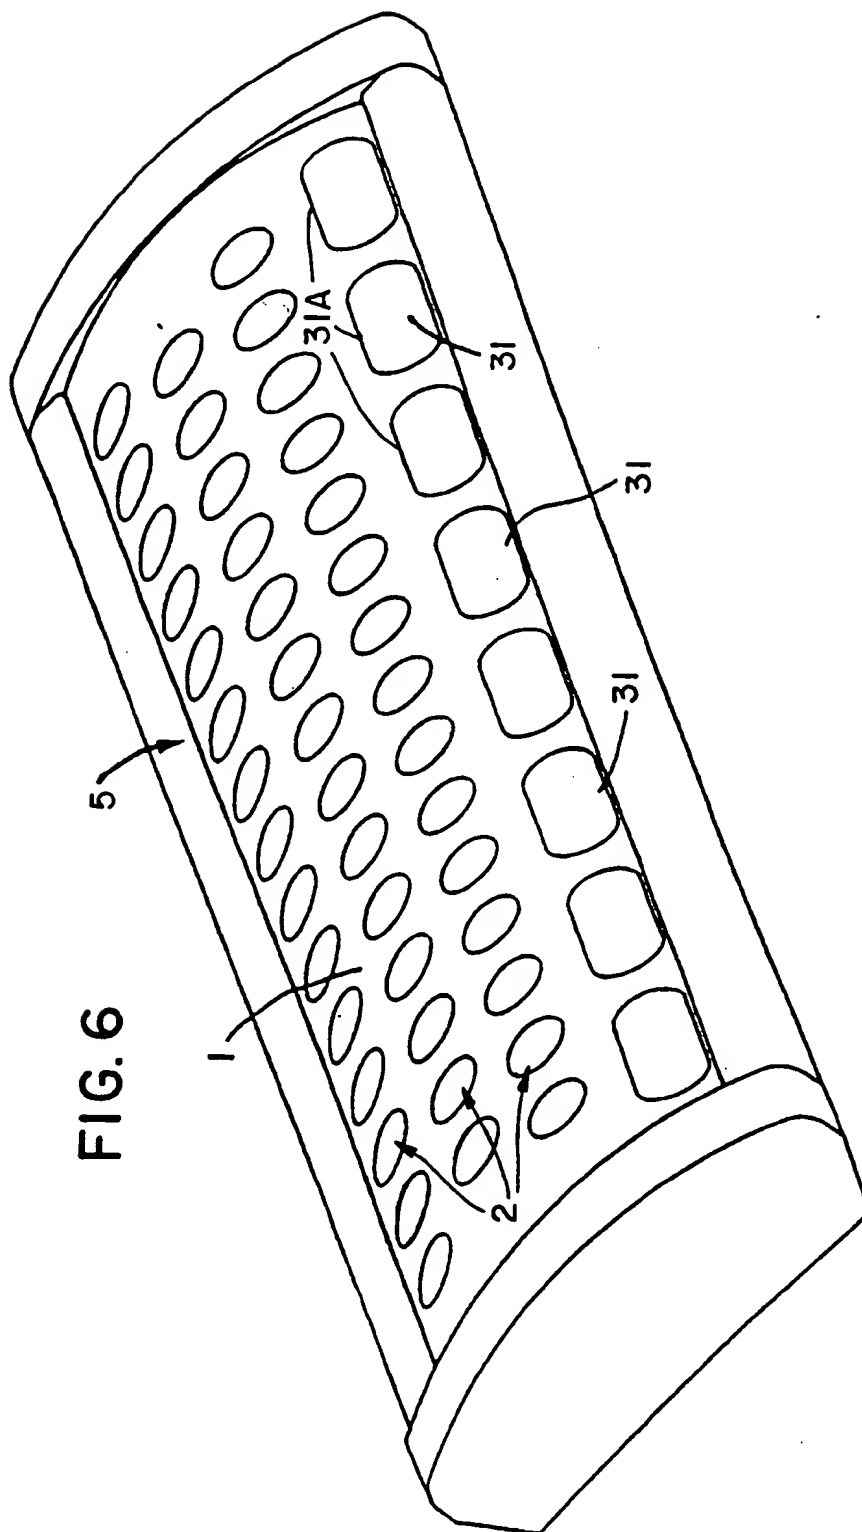


FIG. 6

SUBSTITUTE SHEET

FIG. 7

5 / 7



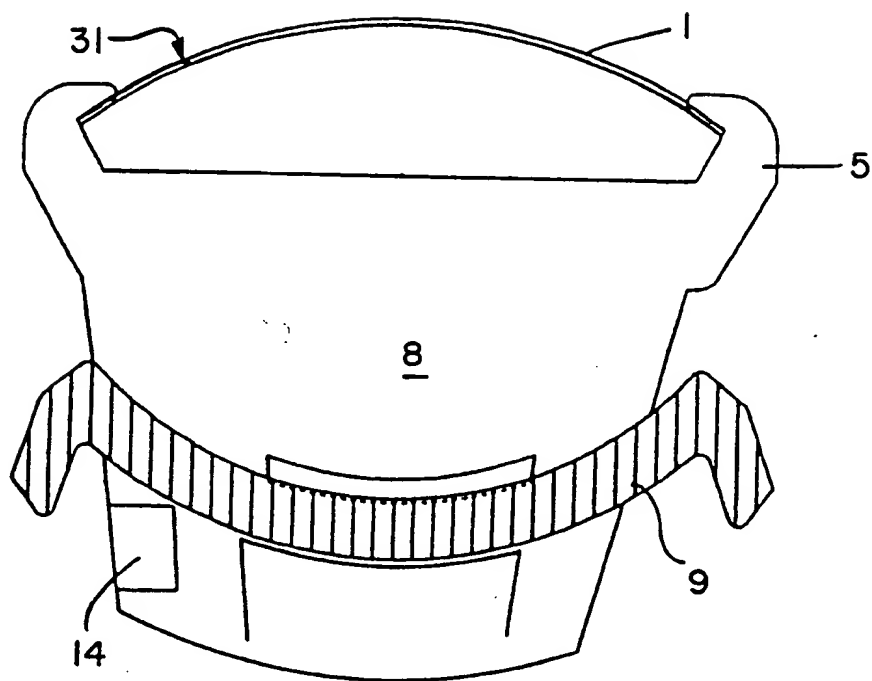


FIG. 8

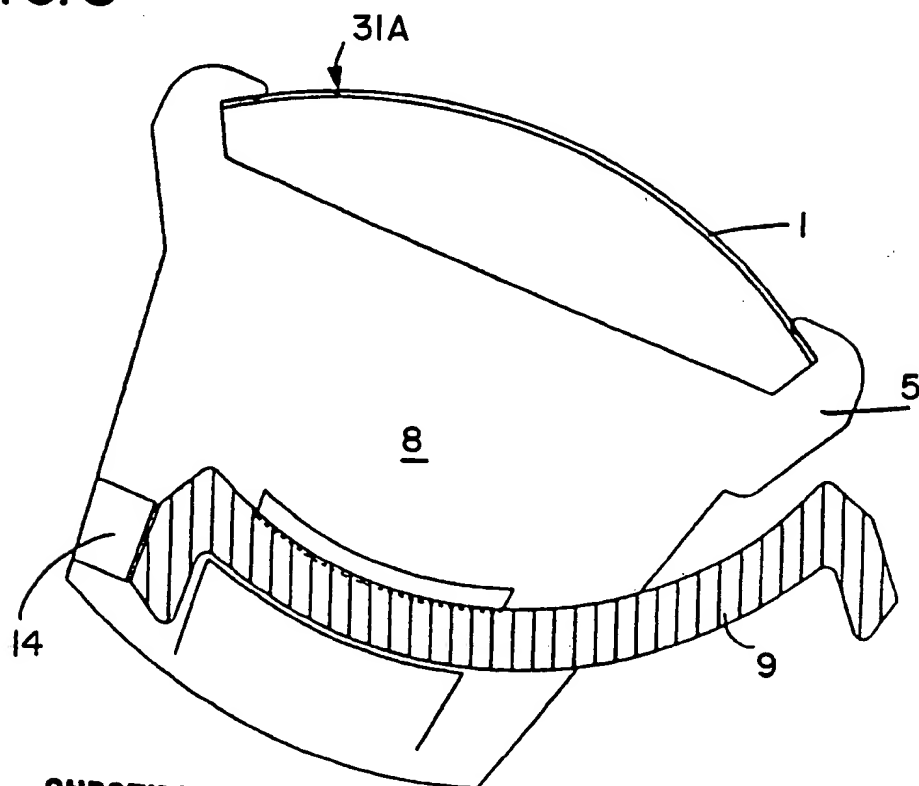

SUBSTITUTE SHEET

FIG. 9

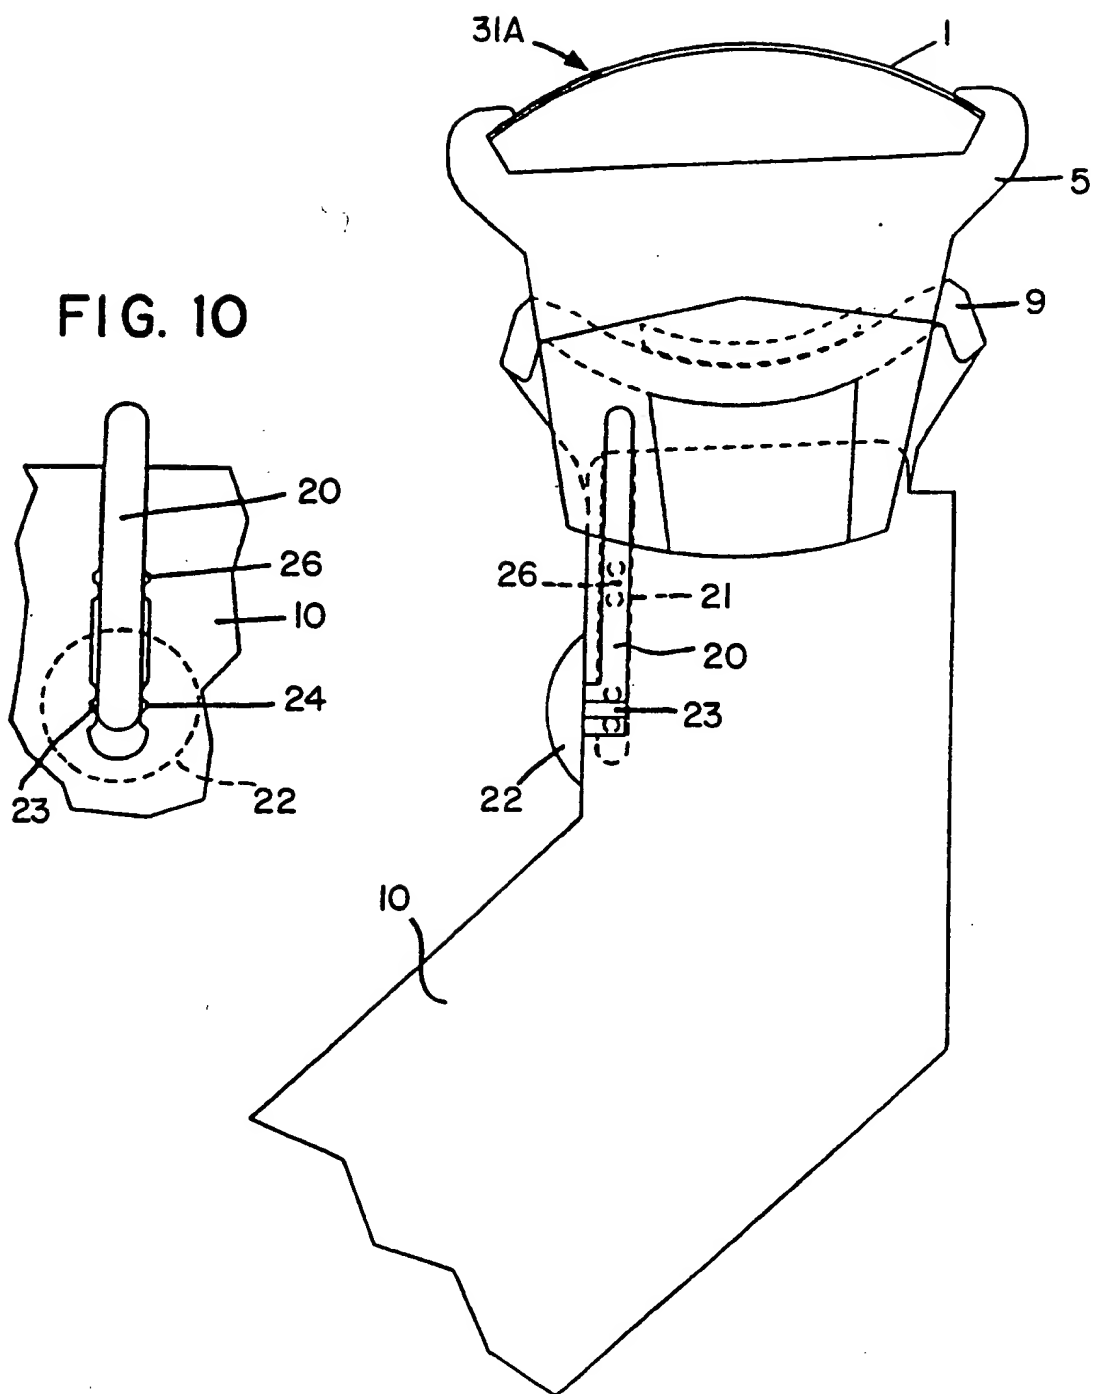


SUBSTITUTE SHEET

7 / 7

FIG. 11

FIG. 12

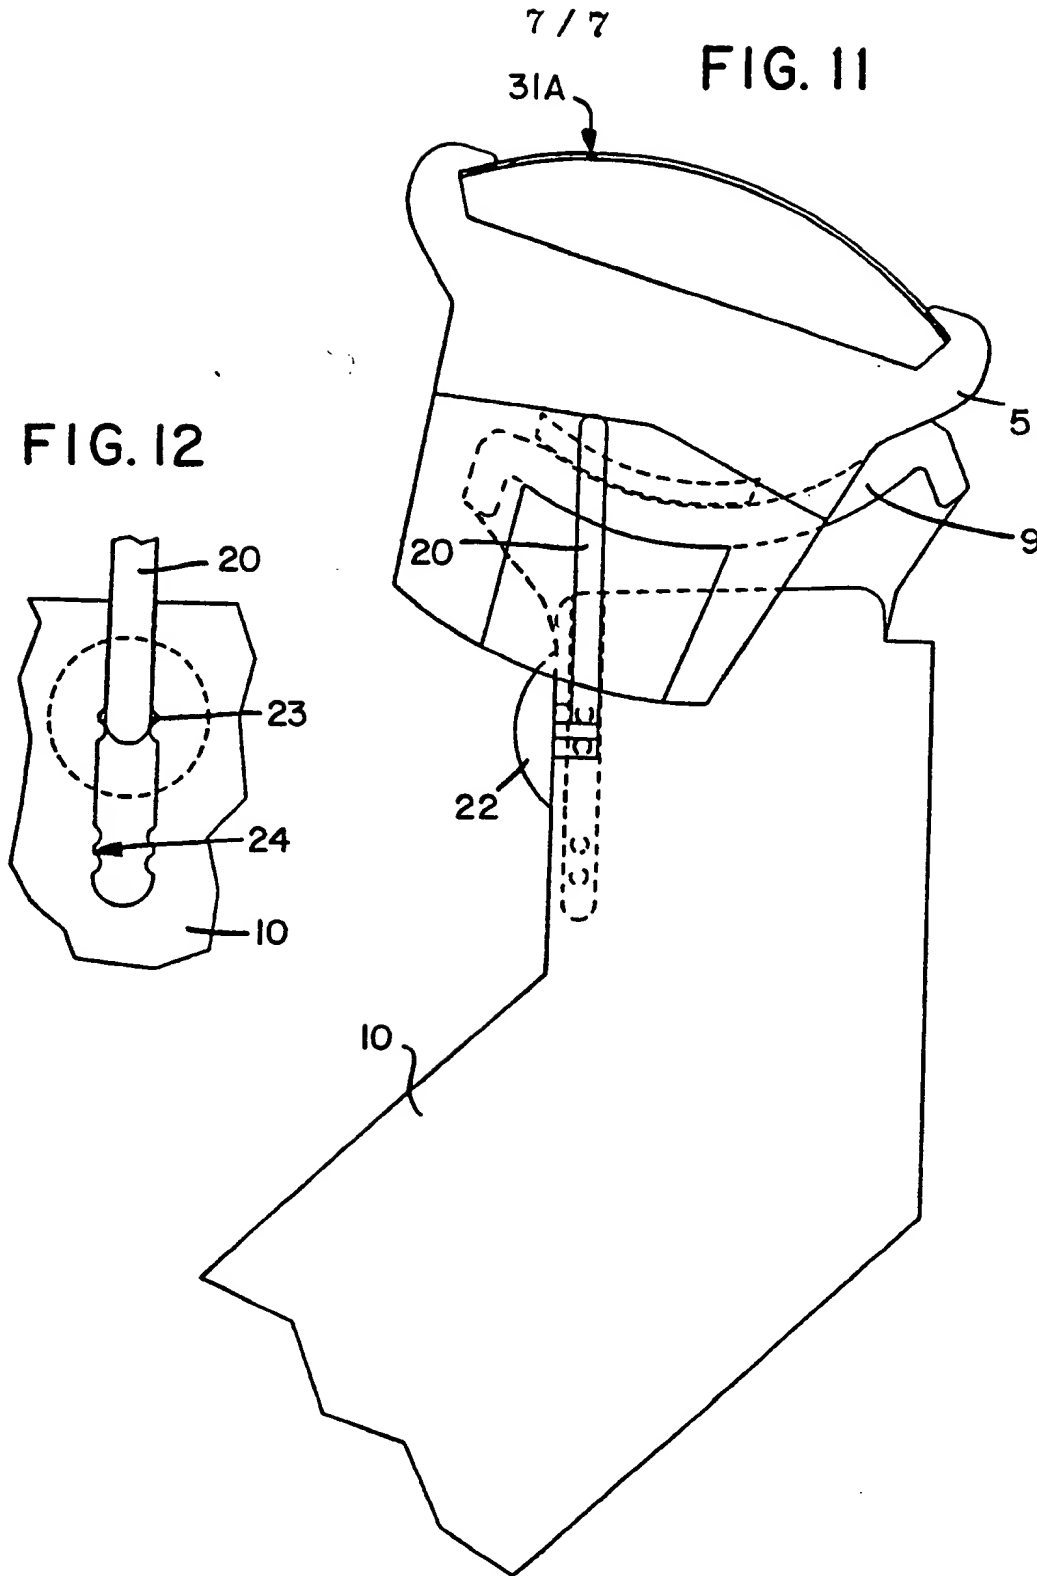

SUBSTITUTE SHEET

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US90/03863

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ¹

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC (5) : B26B 21/18, 21/54

U.S. Cl : 30/34.1, 49, 50, 346.57

II. FIELDS SEARCHED

Minimum Documentation Searched ⁴

Classification System :

Classification Symbols

U.S. 30/34.1, 48.50, 346.55, 346.57

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched ⁵

III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴

Category ⁶	Citation of Document, ¹⁵ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁶
A	US,A 3,871,080 (HEYEK) 18 March 1975 See the entire document.	1-8
A	US,A 4,807,360 (CERIER ET AL) 28 February 1989 See the entire document.	1-8
A P	US,A 4,854,042 (BYRNE) 08 August 1989 See the entire document.	1-8

* Special categories of cited documents: ¹³

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Δ" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search ²

27 SEPTEMBER 1990

Date of Mailing of this International Search Report ³

30 NOV 1990

International Searching Authority ¹

ISA/US

Signature of Authorized Officer ¹⁰

DOUGLAS D. WATTS

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.